Molenstraat 84
B-2640 Mortsel
M +32 (0)474 67 18 82
F +32 (0)3 457 77 17
info@mtechgas.be
www.mtechgas.be

Miniflow 1 & Miniflow 2

Valve:	Fine Control Valve to regulate gas flow complete with flow indicator and polyurethane sampling tube
Primary use:	These valves/flow meters are used with 20 litre canisters. They offer a low cost and convenient method of gas flow regulation between 0.5 – 1.5 l/min, **but do not regulate the pressure**. (Also available for 34, 58 and 110 litre cylinders is a male valve inlet)
Max inlet pressure:	25 bar (370 psig)
Valve inlet:	7/16” – 28NS/2 female
Outlet:	1/6” barb
Flow:	0.5 - 1.5 l/min (also available 1.5 – 2.5 l/min)
Construction:	Brass valve/perspex flow meter (stainless steel ball)

20L
Part number; Miniflow1

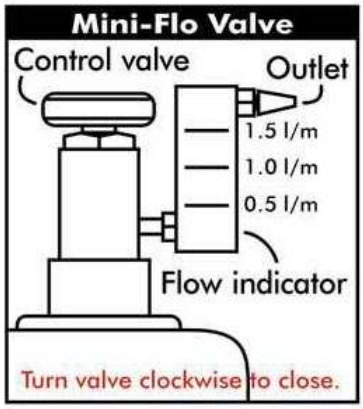

34,58 en 110L
Part number; Miniflow2

Gasdetectietechnieken